


NOTES:

- (1) ALL DIMENSIONS ARE GIVEN IN INCHES AND ARE APPROXIMATE.
- (2) MODEL LC-1PC DIMENSIONS ARE IDENTICAL.
- (3) DRAIN NOTE:  
PROVIDE A DRAIN CAPABLE OF AT LEAST 0.5 GALLONS PER MINUTE. DO NOT MAKE A DIRECT CONNECTION TO THE DRAIN. PROVIDE AN AIR GAP OF AT LEAST 4 TIMES THE DIAMETER OF THE DRAIN TUBING TO CONFORM TO SANITATION CODES AND TO PERMIT THE OBSERVATION OF THE DRAIN FLOW. DO NOT INSTALL A VALVE IN THE DRAIN LINE.

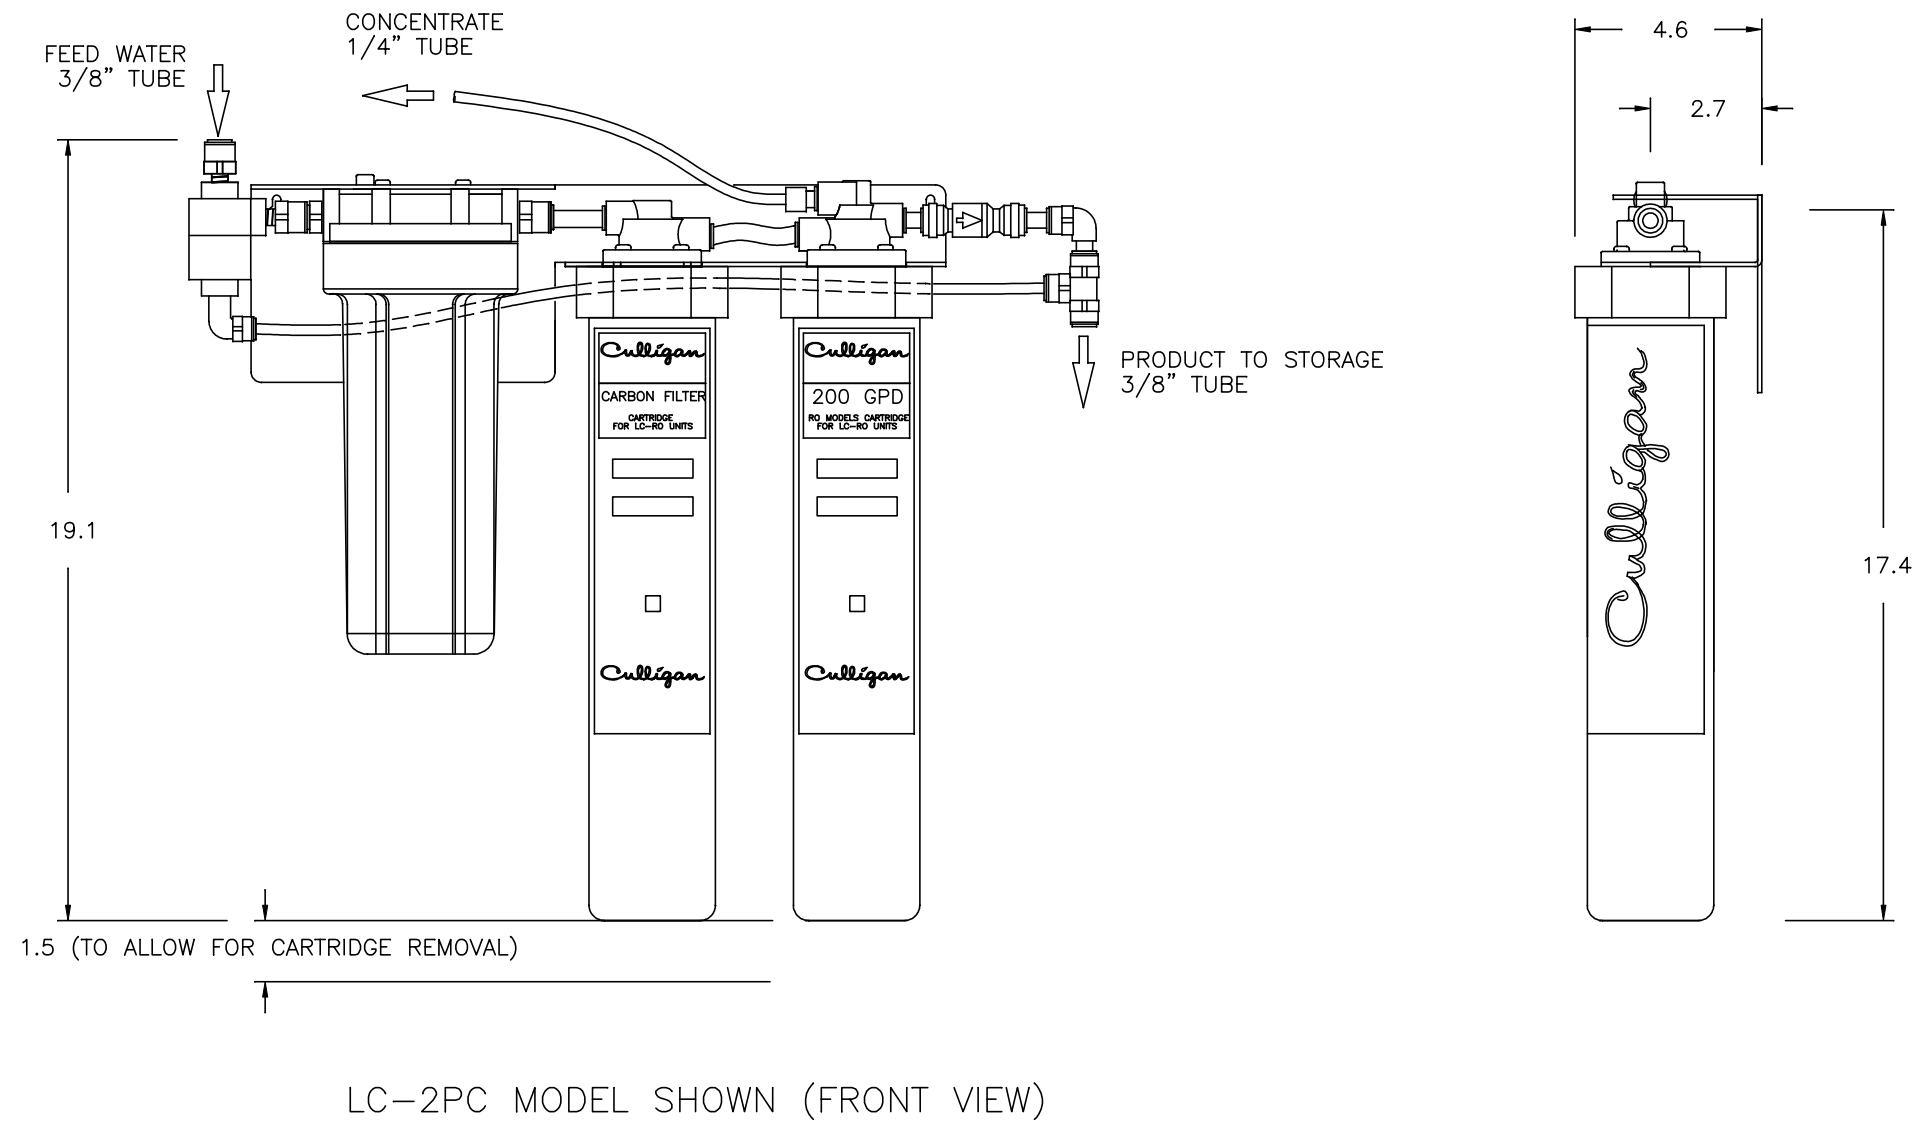

DO NOT SCALE DRAWING  
TOLERANCES: ±1/8" UNLESS OTHERWISE NOTED

Let.	Change	By	App	Date

**Culligan®**  
**ENGINEERED SYSTEMS**  
ROSEMONT, ILLINOIS

PRINT AND BILL OF MATERIAL ARE NOT TO BE USED WITHOUT THE WRITTEN CONSENT OF CULLIGAN INTERNATIONAL CO.

NAME		SERIES LC-1PC/LC-2PC REVERSE OSMOSIS UNIT TECHNICAL DATA SHEET	
DETAILED BY:	APP. BY:	SHEET	
KMR	5/17/02	1 OF 1	
REF. NO.	PART NO.	RO_LCPC	